

# 3. 6X10mm玻璃管快断美规保险丝 Fast acting glass Tube Fuse

Type AM310

Fast Acting glass Tube Fuse

Pig-Tail Series



## Approvals

UL Listed 50mA~8A      UL Listed 50mA~8A  
 CSA Certified 50mA~8A      CSA Certified 50mA~8A

## Electrical Characteristics

Rated Current	1 In	2 In
	MIN	MAX
50mA~8A	4 Hrs	5 Sec

## Interrupting Ratings

50 amperes at 250V AC

-55 to +125

## Options

With heat shrink TUBing (VM-1) over body  
 AMAN310 Series Available on tape and reel

Physic all specification

## Materials

Glass body/Nickel Brass Caps

Lead wire:


Diameter 0.6mm 5A adn less.

Diameter 0.65mm for ratin.


## Packaging

In Bulk:

AMAN -500pcs; AMAN310-200pcs



Ampere Rating [In]	Voltage Rating (V)	Nominal Resistance Cold Ohms	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec
100mA	125V 250V	4.8250	0.00194
125mA		3.8620	0.00286
200mA		1.7302	0.01137
250mA		1.6120	0.02248
300mA		0.9250	0.02945
400mA		0.5840	0.06950
500mA		0.2322	0.12750
600mA		0.1765	0.21800
750mA		0.1310	0.25420
800mA		0.1215	0.30420
1A		0.1056	0.50800
1.5A		0.0595	0.88400
1.6A		0.0565	0.96500
2A		0.0378	2.27000
2.5A		0.0342	3.73240
3.15A		0.0253	5.95200
4A	0.0170	9.77000	
5A	0.0145	15.5600	
6A	0.0132	17.9730	
6.3A	0.0120	19.2510	
6.5A	0.0118	21.8500	
7A	0.0111	25.8150	
8A	0.0088	35.2150	

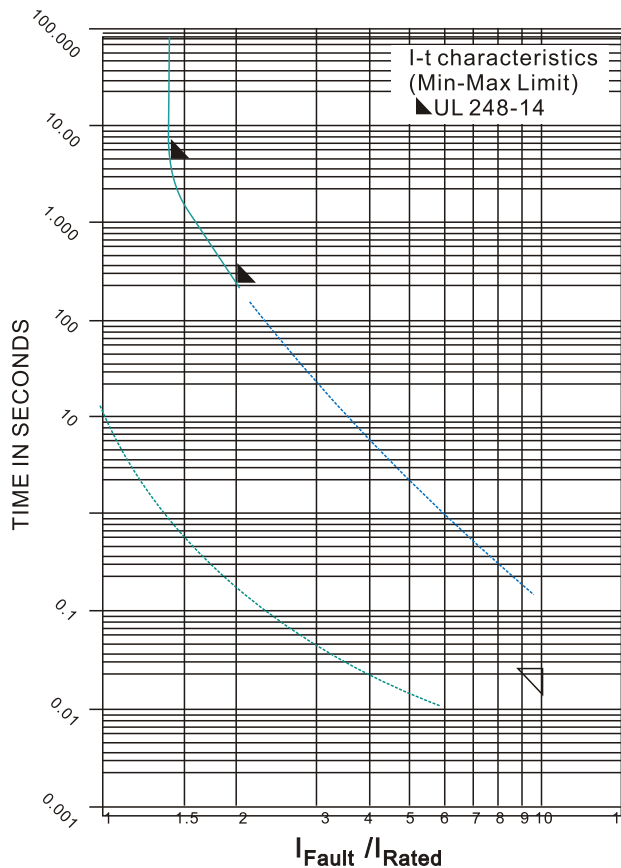

# 东莞市石碣安秒电子厂

Web : [www.baioxianzuo.com](http://www.baioxianzuo.com)

Add : 石碣镇桔洲第三工业区

Tel : 0769 - 86306011

Fax : 0769 - 27206050